

# CTRLCap Hardware Quickstart

## 1. Remove your old cap

On most fader, you can just lift the cap with a screwdriver or a small coin.

For Pioneer (such as S9 mixer) :

1. Lift and remove the white part using a small screwdriver or a knife (be careful)



2. Then remove the cap using a coin or a screwdriver as a lever



### 3. Remove the small clips



## 2. Prepare the CTRLCap for you fader size

1. Choose the fitting adaptor (4mm or 8mm) and plug it once on your fader to stretch it



2. Remove it and push in into the CTRLCap.  
The 8mm should be easy to push in place.

The 4mm will require to be perfectly centered and will require some strength, if it's not completely in, push the CTRLCap against a clean flatsurface.




### 3. Put the CTRLCap on the fader

#### 4mm fader

Align the CTRLCap with the fader and push it down.

## 8mm fader

1. Insert the CTRLCap tilted (one side first)
2. Push down while tilting back the CTRLCap to a straight position
3. Push it down until

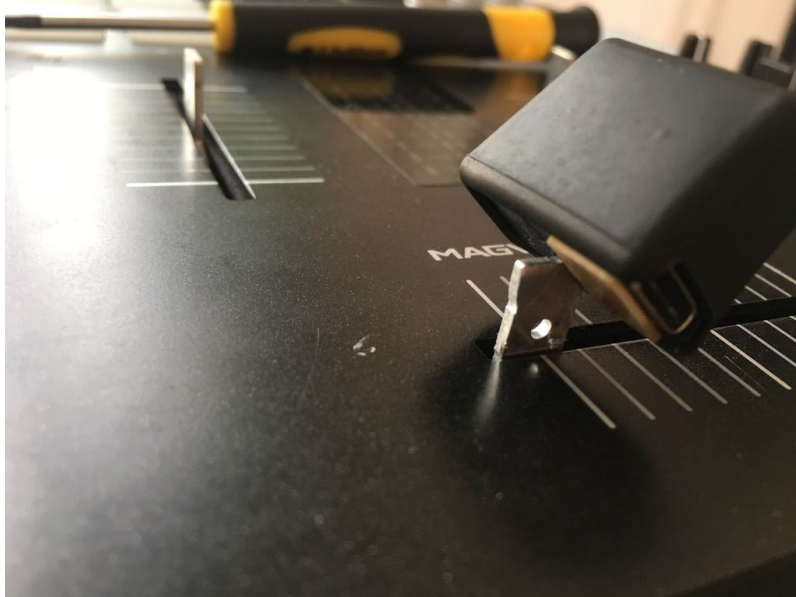

## 4. Download and install the CTRLCap software

From <http://www.ctrl-cap.club/downloads>